




CONTINUOUS RUN FRAME-1 3/4"

PROJECT	
TYPE	PART#

PRODUCT FEATURES

- Easy assembly and installation
- Durable extruded aluminum frame
- Decorative, elegant appearance with beveled edge
- For use with TILT® Linear Series Lights (Panels sold separately)
- Mount to any hard surface
- TILT® Driver must be mounted remotely
- Durable powder coat finish (white)
- Built to run continuously
- Custom sizes and colors available upon request

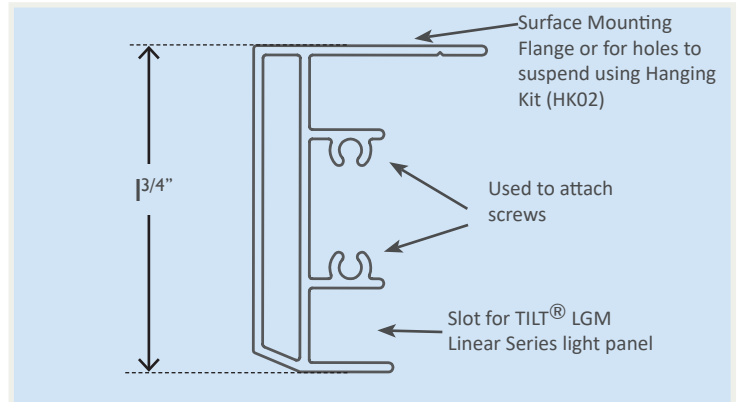

PART NUMBER & PRODUCT GUIDE (CONTINUOUS RUN FRAME-1 3/4")

Product Ordering Guide (example) :
 Part# SM04**175W-CR = 4" Linear 1.75" Continuous Run Frame and ** equals total number of panels

Part#	Description	Size (WxLxD)
SM0405175W-CR	4" Linear 1.75" 20Ft. Continuous Run Frame	4"x 240"x 1.75"
SM0410175W-CR	4" Linear 1.75" 40Ft. Continuous Run Frame	4"x 480"x 1.75"
SM0415175W-CR	4" Linear 1.75" 60 Ft. Continuous Run Frame	4"x 720"x 1.75"
SM0420175W-CR	4" Linear 1.75" 80Ft. Continuous Run Frame	4"x 960"x 1.75"
SM0425175W-CR	4" Linear 1.75" 100Ft. Continuous Run Frame	4"x 1200"x 1.75"
SM0605175W-CR	6" Linear 1.75" 20Ft. Continuous Run Frame	6"x 240"x 1.75"
SM0610175W-CR	6" Linear 1.75" 40Ft. Continuous Run Frame	6"x 480"x 1.75"
SM0615175W-CR	6" Linear 1.75" 60Ft. Continuous Run Frame	6"x 720"x 1.75"
SM0620175W-CR	6" Linear 1.75" 80Ft. Continuous Run Frame	6"x 960"x 1.75"
SM0625175W-CR	6" Linear 1.75" 100Ft. Continuous Run Frame	6"x 1200"x 1.75"
SM0805175W-CR	8" Linear 1.75" 20Ft. Continuous Run Frame	8"x 240"x 1.75"
SM0810175W-CR	8" Linear 1.75" 40Ft. Continuous Run Frame	8"x 480"x 1.75"
SM0815175W-CR	8" Linear 1.75" 60Ft. Continuous Run Frame	8"x 720"x 1.75"
SM0820175W-CR	8" Linear 1.75" 80Ft. Continuous Run Frame	8"x 960"x 1.75"
SM0825175W-CR	8" Linear 1.75" 100Ft. Continuous Run Frame	8"x 1200"x 1.75"

PART NUMBER & PRODUCT GUIDE (CONTINUOUS RUN FRAME-1 3/4")

Part#	Description	Size (WxLxD)
SM1005175W-CR	10" Linear 1.75" 20Ft. Continuous Run Frame	10"x 240"x 1.75"
SM1010175W-CR	10" Linear 1.75" 40Ft. Continuous Run Frame	10"x 480"x 1.75"
SM1015175W-CR	10" Linear 1.75" 60Ft. Continuous Run Frame	10"x 720"x 1.75"
SM1020175W-CR	10" Linear 1.75" 80Ft. Continuous Run Frame	10"x 960"x 1.75"
SM1025175W-CR	10" Linear 1.75" 100Ft. Continuous Run Frame	10"x 1200"x 1.75"
SM1205175W-CR	12" Linear 1.75" 20Ft. Continuous Run Frame	12"x 240"x 1.75"
SM1210175W-CR	12" Linear 1.75" 40Ft. Continuous Run Frame	12"x 480"x 1.75"
SM1215175W-CR	12" Linear 1.75" 60Ft. Continuous Run Frame	12"x 720"x 1.75"
SM1220175W-CR	12" Linear 1.75" 80Ft. Continuous Run Frame	12"x 960"x 1.75"
SM1225175W-CR	12" Linear 1.75" 100Ft. Continuous Run Frame	12"x 1200"x 1.75"

DRIVER BOARD OPTION (SOLD SEPARATELY)

Part#	Description	Width
DB06	6" Driver Board for Mounting Option C (see below)	6"
DB08	8" Driver Board for Mounting Option C (see below)	8"
DB10	10" Driver Board for Mounting Option C (see below)	10"
DB12	12" Driver Board for Mounting Option C (see below)	12"


HANGING KIT OPTION (SOLD SEPARATELY)



Part#	Description
HK02	2 piece Hanging Kit (10 Ft. length) Use to hang surface mount frame from ceiling or substrate

FRAME SECTION DETAIL

FRAME SECTION DETAIL

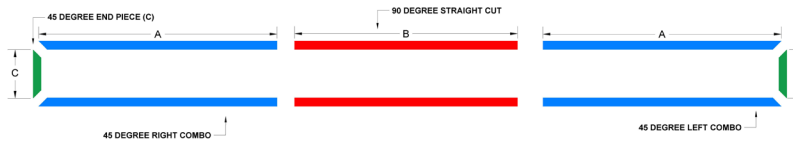


LINEAR 48" PANEL CAPACITY		FRAME SECTION (A)	
QTY.	Item	Actual Length	Nominal Length
1	45 Degree L/R Combo (2 Pieces)	48.20"	48"
2	45 Degree L/R Combo (2 Pieces)	96.00"	96"
2.5	45 Degree L/R Combo (2 Pieces)	120.00"	120"
3	45 Degree L/R Combo (2 Pieces)	144.00"	144"
For every section (2 pieces) of frame, extension keys and 2 z-braces will be provided.			

LINEAR 48" PANEL CAPACITY		FRAME SECTION (B)	
QTY.	Item	Actual Length	Nominal Length
1	90 Degree Straight Cut (2 Pieces)	47.80"	48"
2	90 Degree Straight Cut (2 Pieces)	95.50"	96"
2.5	90 Degree Straight Cut (2 Pieces)	119.40"	120"
3	90 Degree Straight Cut (2 Pieces)	143.30"	144"
For every section (2 pieces) of frame, extension keys and 2 z-braces will be provided.			

FRAME SECTION (C)		
ITEM	Actual Width	Nominal Width
45 Degree End Piece (2 Pieces)	4.50"	4"
45 Degree End Piece (2 Pieces)	6.50"	6"
45 Degree End Piece (2 Pieces)	12.50"	12"
For every section (2 pieces) of frame, extension keys and 2 z-braces will be provided.		


1 3/4" CONTINUOUS-RUN Z-BRACE

Used to stabilize continuous-run sections. Any point along a continuous-run fixture shall not be more than 48" from a Z-brace.



1 3/4" CONTINUOUS-RUN EXTENSION KEY

Used to connect continuous-run sections together.



MOUNTING DIAGRAMS

