



TROFFERS

PROJECT	
TYPE	PART#

PRODUCT FEATURES

- Easy to install and requires no assembly
- Durable stamped steel construction
- Polycarbonate diffuser
- For use with TILT® Drivers and accessories
- For use in Grid ceiling applications
- Durable powder coat finish (white)




PART NUMBER & PRODUCT GUIDE (TROFFERS)

Part#	Description	Size	Color Temp	CRI	R9	Lumens	AC Watts	DC Watts	L/W-DC
LT2230W	2'x2' Troffer	24"x24"x3"	3000K	>80	>5	3800	34.5	30	127
LT2235W	2'x2' Troffer	24"x24"x3"	3500K	>80	>5	4000	34.5	30	133
LT2240W	2'x2' Troffer	24"x24"x3"	4000K	>80	>5	4200	34.5	30	140
LT2250W	2'x2' Troffer	24"x24"x3"	5000K	>80	>5	4250	34.5	30	142
LT2430W	2'x4' Troffer	24"x48"x3"	3000K	>80	>5	6500	49	45	144
LT2435W	2'x4' Troffer	24"x48"x3"	3500K	>80	>5	6700	49	45	149
LT2440W	2'x4' Troffer	24"x48"x3"	4000K	>80	>5	6800	49	45	151
LT2450W	2'x4' Troffer	24"x48"x3"	5000K	>80	>5	6900	49	45	153



DRIVER SPECIFICATIONS

Part #	Size (WxLxD)	AC Input	DC Output	Working Temp	Max Lights/ Driver
LD16	3.0" x 12.0" x 1.5"	90 - 305V	24V / 16W	-35-70C	0
LD25	3.0" x 12.0" x 1.5"	90 - 305V	24V / 25W	-35-70C	0
LD40	3.0" x 12.0" x 1.5"	90 - 305V	24V / 40W	-40-70C	1
LD60	3.0" x 12.0" x 1.5"	90 - 305V	24V / 60W	-40-70C	2
LD90	3.0" x 12.0" x 1.5"	90 - 305V	24V / 90W	-40-70C	3
LD100P	2.6" x 14.0" x 1.6"	90 - 305V	24V / 100W	-40-60C	3


DIMENSIONAL DATA



2' x 2' Troffer

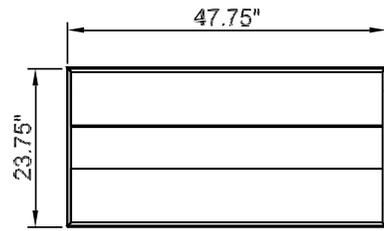

2' x 4' Troffer



**2'x2' Product Weight: 6.5 lbs**  
**2'x4' Product Weight: 11.8 lbs**

