



STANDARD DRIVERS

INDUSTRY-LEADING
10 YEAR
WARRANTY


PROJECT

TYPE

PART#

PRODUCT FEATURES

- Class II power unit; SELV rated
- Plug & Play 24 Volt design for quick install and design flexibility
- Constant voltage design allows multiple lights per driver and greater energy efficiency
- UL registered; CE certified; RoHS compliant
- Plenum rated suitable for use in air handling spaces
- Protections include: short circuit, over current, over voltage and over temperature
- Built-in active power factor correction (PFC)

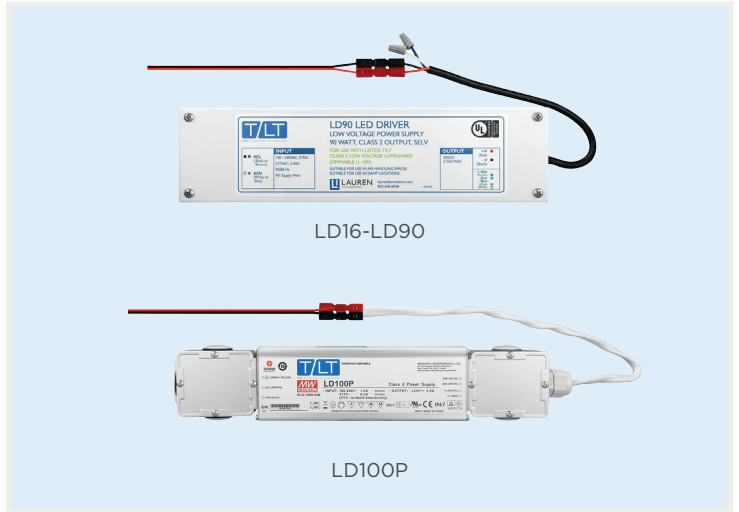


PART NUMBER & PRODUCT GUIDE (STANDARD DRIVERS)


Part#	Size (WxLxD)	AC Input			DC Output			Safety		
		Voltage	Inrush Current*	Max Amps**	Voltage	Max Amps	Power	Working Temperature	Thermal Shutdown	IP Rating
LD16	3.0" x 12.0" x 1.5"	120-277V	45A	0.38A	24VDC	0.67A	16W	-35-70C	75C	IP30
LD25	3.0" x 12.0" x 1.5"	120-277V	45A	0.38A	24VDC	1.05A	25W	-35-70C	75C	IP30
LD40	3.0" x 12.0" x 1.5"	120-277V	55A	0.57A	24VDC	1.67A	40W	-40-70C	75C	IP67
LD60	3.0" x 12.0" x 1.5"	120-277V	55A	0.76A	24VDC	2.50A	60W	-40-70C	75C	IP67
LD90	3.0" x 12.0" x 1.5"	120-277V	70A	0.91A	24VDC	3.75A	90W	-40-70C	70C	IP67
LD100P	2.6" x 14.0" x 1.6"	120-277V	60A	1.14A	24VDC	4.00A	96W	-40-60C	70C	IP67

* @230V **@110V

AC WIRING DETAIL

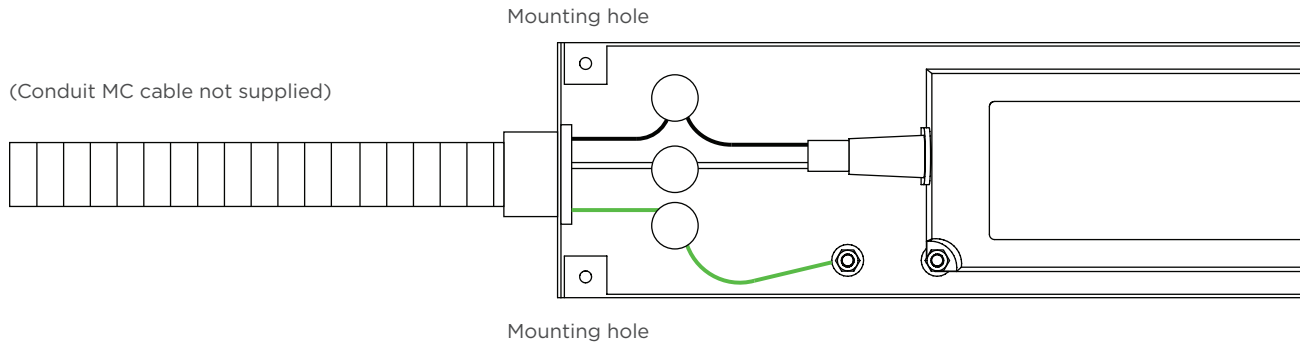

DC WIRING DETAIL

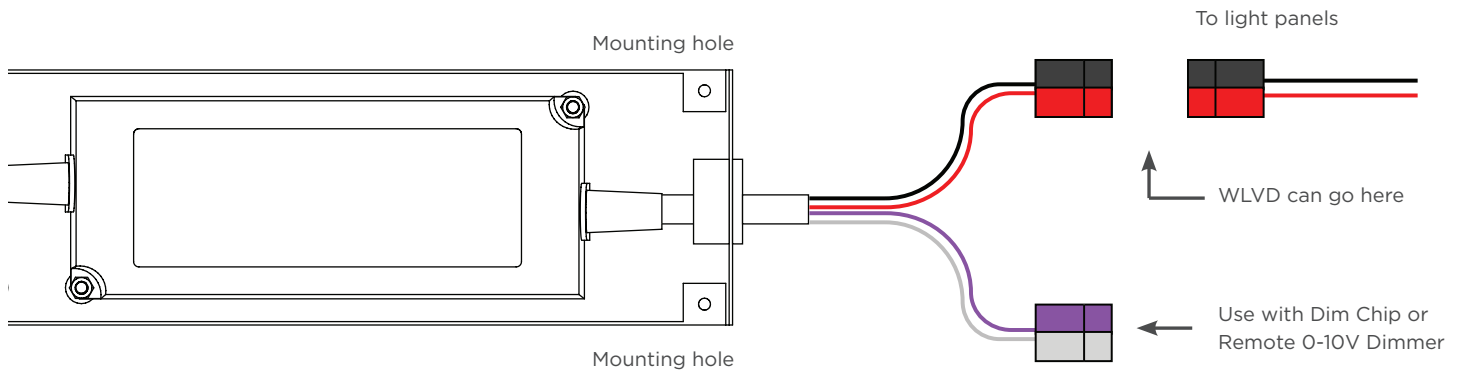

NOTES

- See Installation Instructions for approved installation methods and other details
- Lights must be located within 50 feet of Driver
- Wattage load of lights must not exceed wattage of Driver
- TILT® Drivers are designed to work with TILT® 1-10V dimmers and controls, as well as other 0-10V dimming and control systems
- For details specific to your system, call us at 855.440.8458

